


Figure 1

003007" 09T08960

00500T" 09T00560

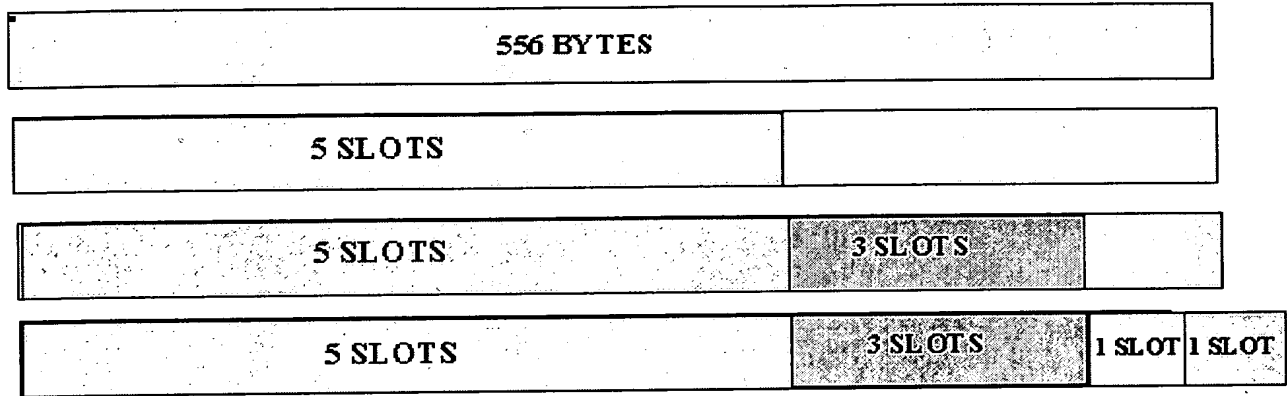

SAR

Figure 2

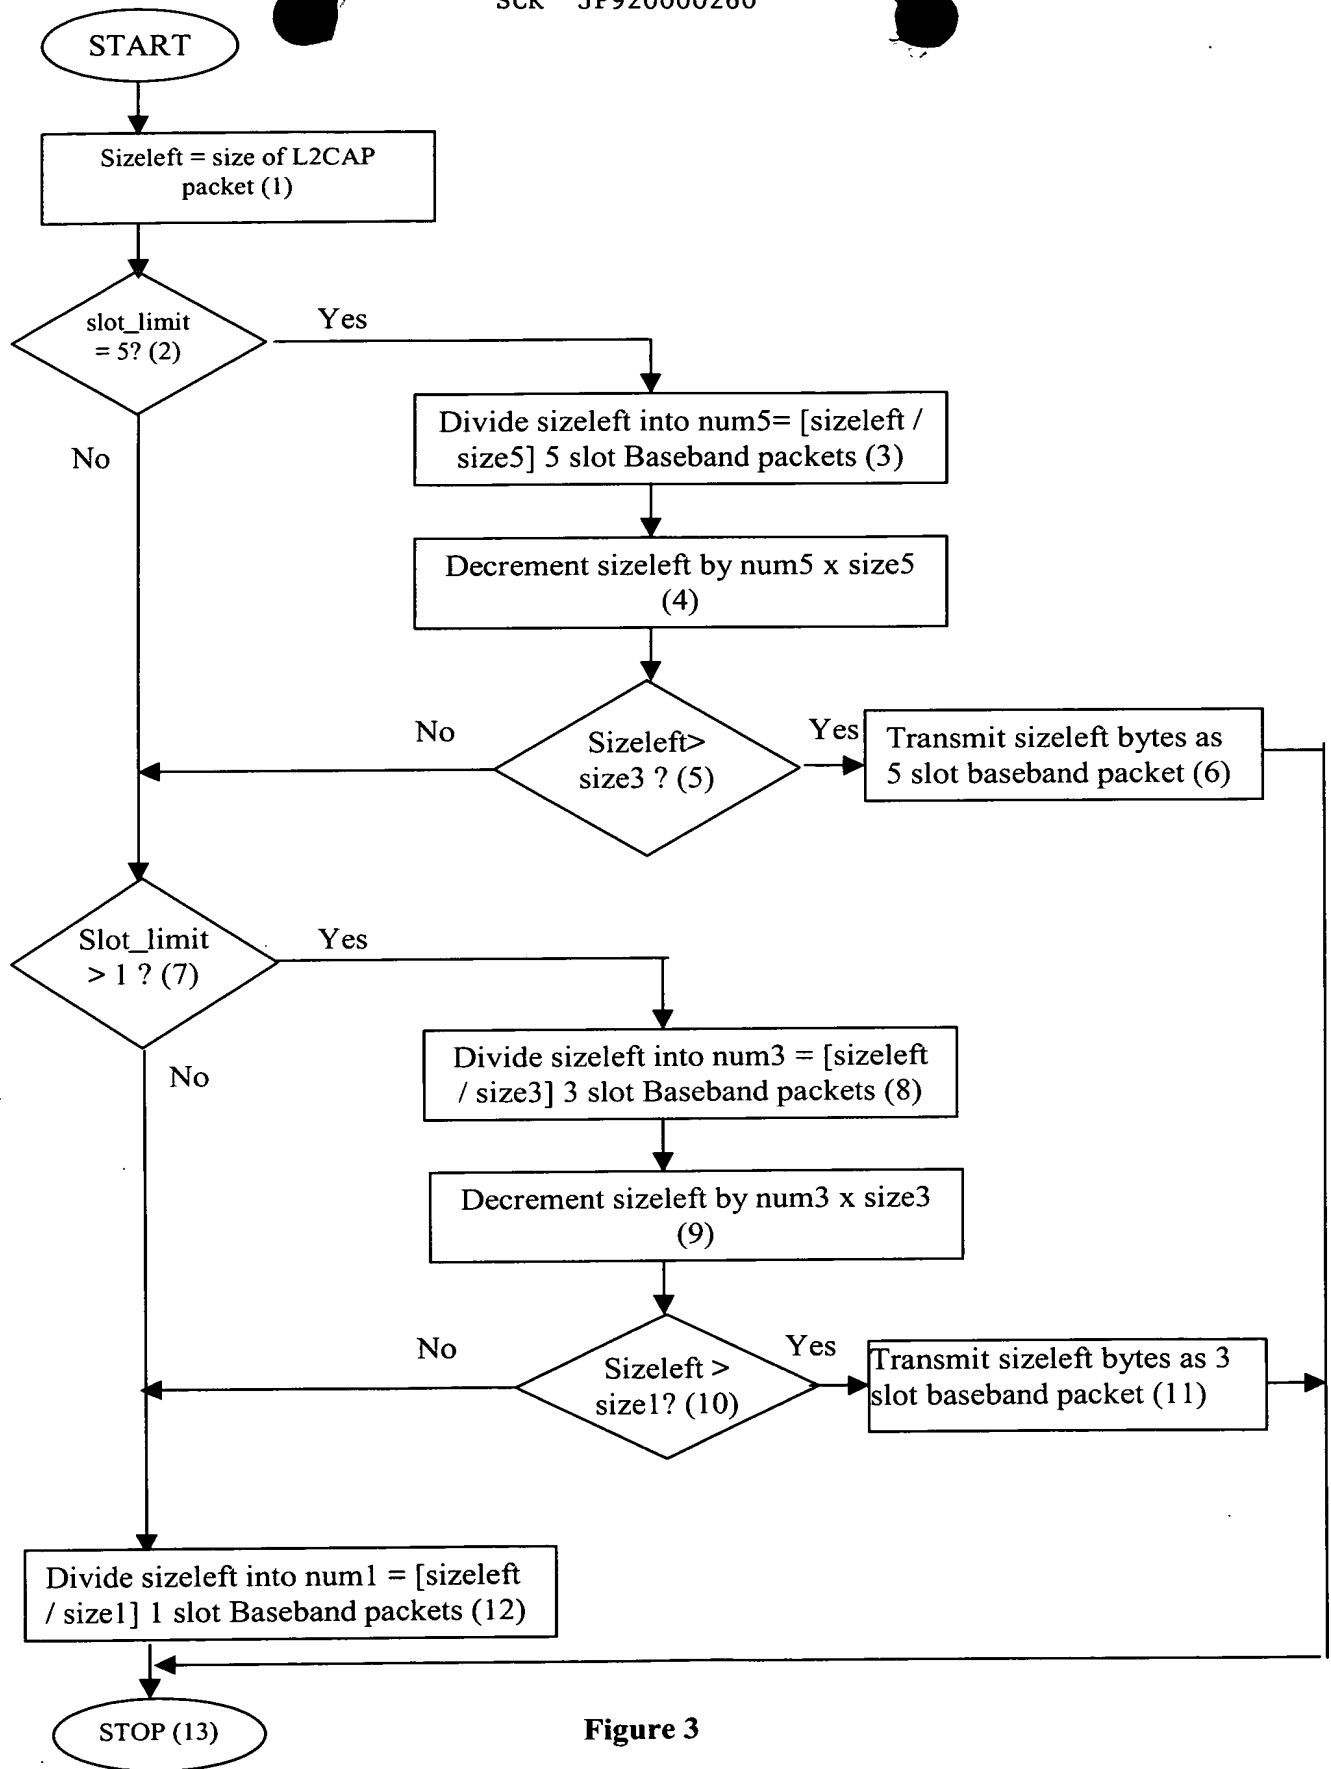


Figure 3

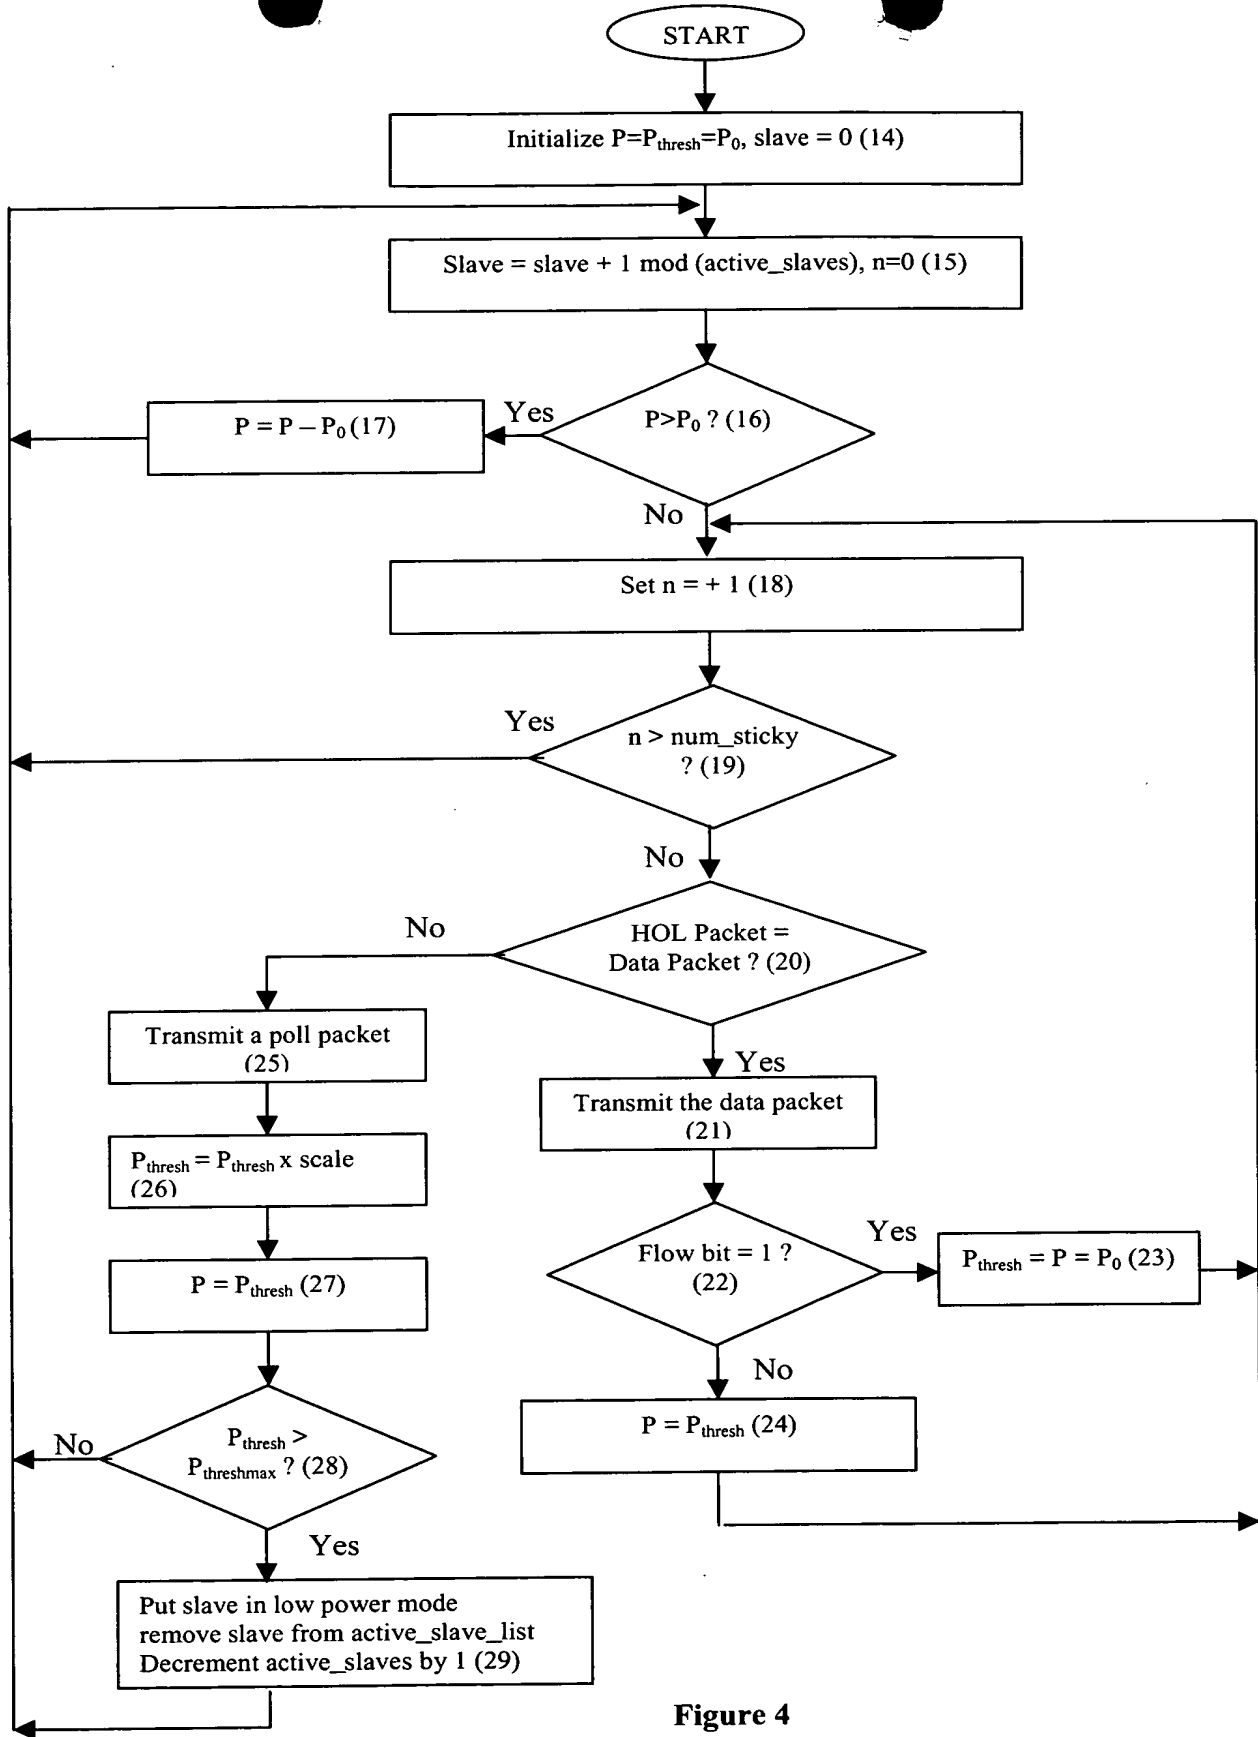


Figure 4




Figure 5 : Simulation Scenario

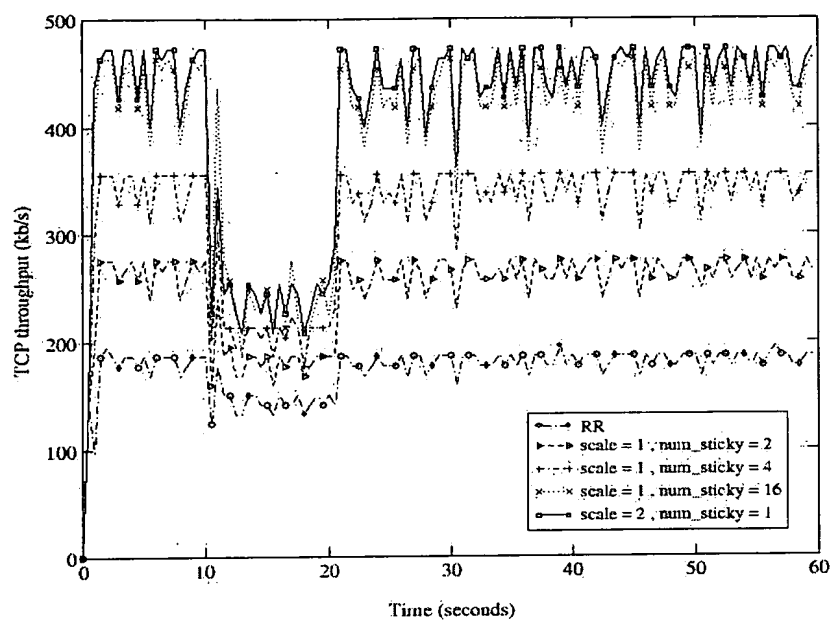


Figure 6: TCP throughput for different values of *num_sticky*

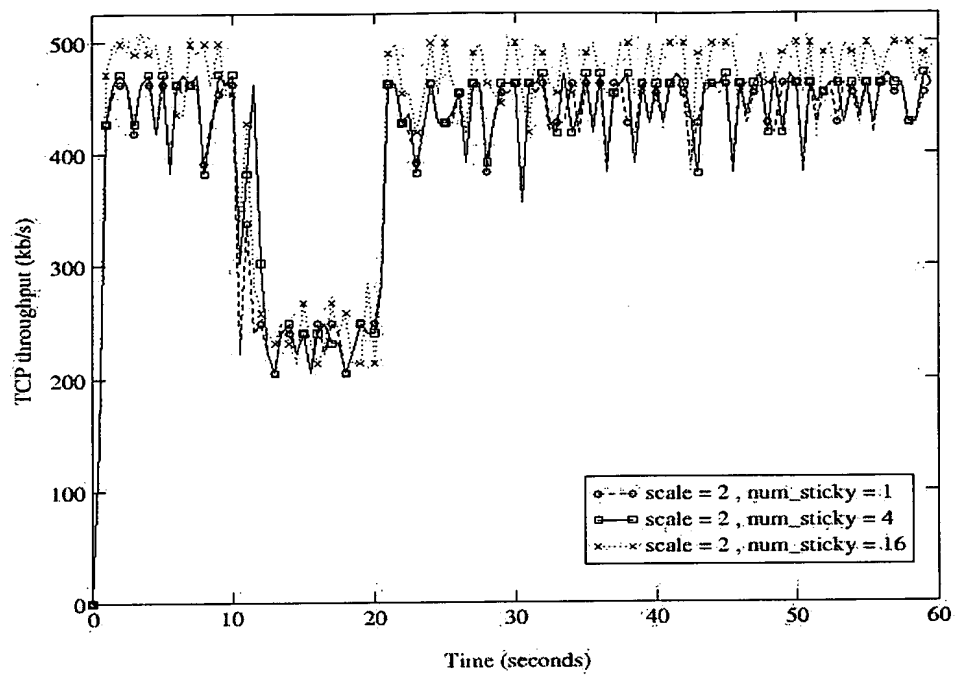


Figure 7: TCP throughput for different value of *num_sticky* with *scale* set to 2

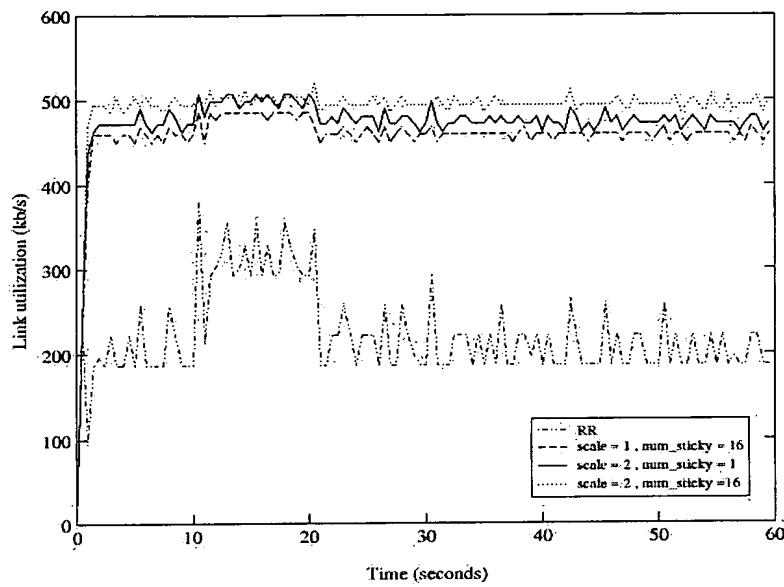


Figure 8: Link utilization with AFP variations

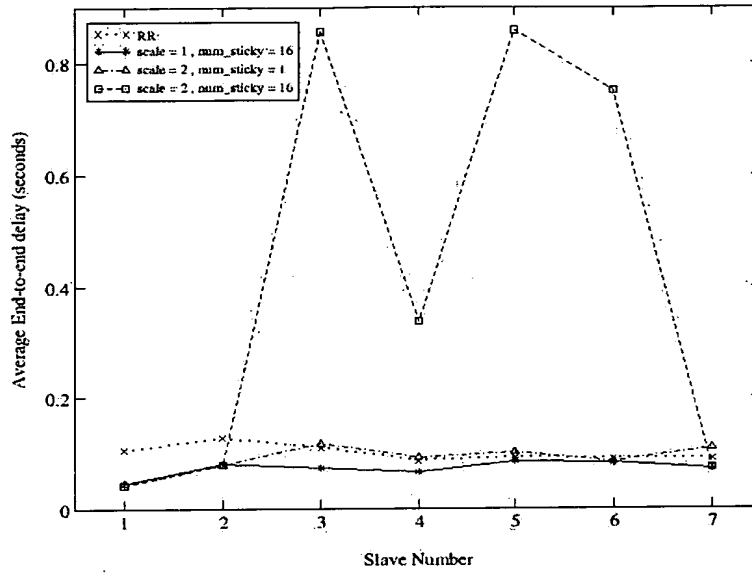


Figure 9